

Belgotex™
Academia Collection

STOCK

Belgotex™
Academia Collection



Edison & Rutherford

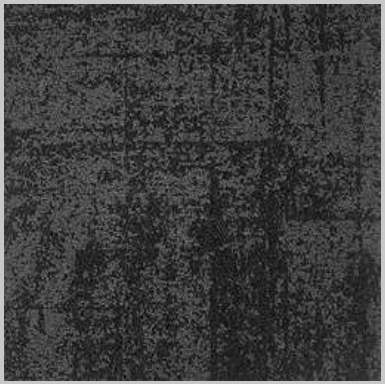

Edison



Wilkins



Rutherford



Mantell

B_

Belgotex™
Academia Collection


Burbidge


Telford

EXTENDED SPECIFICATIONS

Use Classification: (EN 1307)	Heavy Commercial - 33
Construction:	Tufted Pattern Colour Placement Loop Pile
Fibre Type:	SDX (Solution Dyed Nylon-6)
Fibre Mass: (ISO 8543)	± 450 g/m2 (±15) | ± 13.27 oz/yd2 (±0.44)
Pile Height:	± 4 mm (±0.5) | ± 0.12 in (±0.02)
Total Thickness: (ISO 8543)	± 7.5 mm (±0.5) | ± 0.29 in (±0.02)
Total Mass: (ISO 8543)	± 2330 g/m2** (±5%) | ± 68.71 oz/yd2** (±5%)
Standard Size (Tiles):	50x50 cm | 19.69x19.69 (in)
Standard Backing:	Eco Bac - 300g
Machine Gauge:	1/10"
Fire Classification: (EN 13501) (ASTM E 648-08)	Bfl-s1

Colour Fastness to: (NF EN ISO 105-BO2) (ISO 105-X12) (ISO 105-EO1)	Light >6.0 Rubbing (staining) 4-5 Water (staining) 4-5
Electrostatic Propensity (Body voltage): (ISO6356:2012)	⩽2.0kV
Sound Absorption: (ISO 354:2003)	aw:0.25
Sound Insulation: (ISO 717-2)	Δ Lw 26 dB
Thermal Resistance: (ISO 8302)	0.1263 m2.K/W
Dimensional Stability: (ISO 986:2006)	⩽ 0.2%
VOC Emissions: (ASTM D5116:2017) (GBCSA/GBCA & CRI Specifications)	Passed
Castor Chair Suitability: (NF EN 985)	A: Intense Use
Warranty:	15 year
Guarantee:	5 year

**Weighted Average

B_

TECHNICAL SPECS

Bill of Quantities

- Belgotex's ACADEMIA 50x50cm Heavy Commercial 7.5mm Bitumen Free tiles are manufactured from Solution Dyed Nylon.
- This product is to be laid in accordance with the S A N S 10186 fitting code of practice.
- Belgotex's A C A D E M I A tiles to be installed in the following directions: Ashlar/Random Ashlar/Brick/Monolithic/Tessellated.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- A s these M T O offerings are not standard stock, minimum production quantities apply. Please contact your nearest Belgotex representative for more information on this.
- 15-year warranty and 5-year guarantee.
- Made in South Africa.
- Green tag level A Gold rated certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.




B_


1307
Belgotex™
African Skies

STOCK

Belgotex™
African Skies

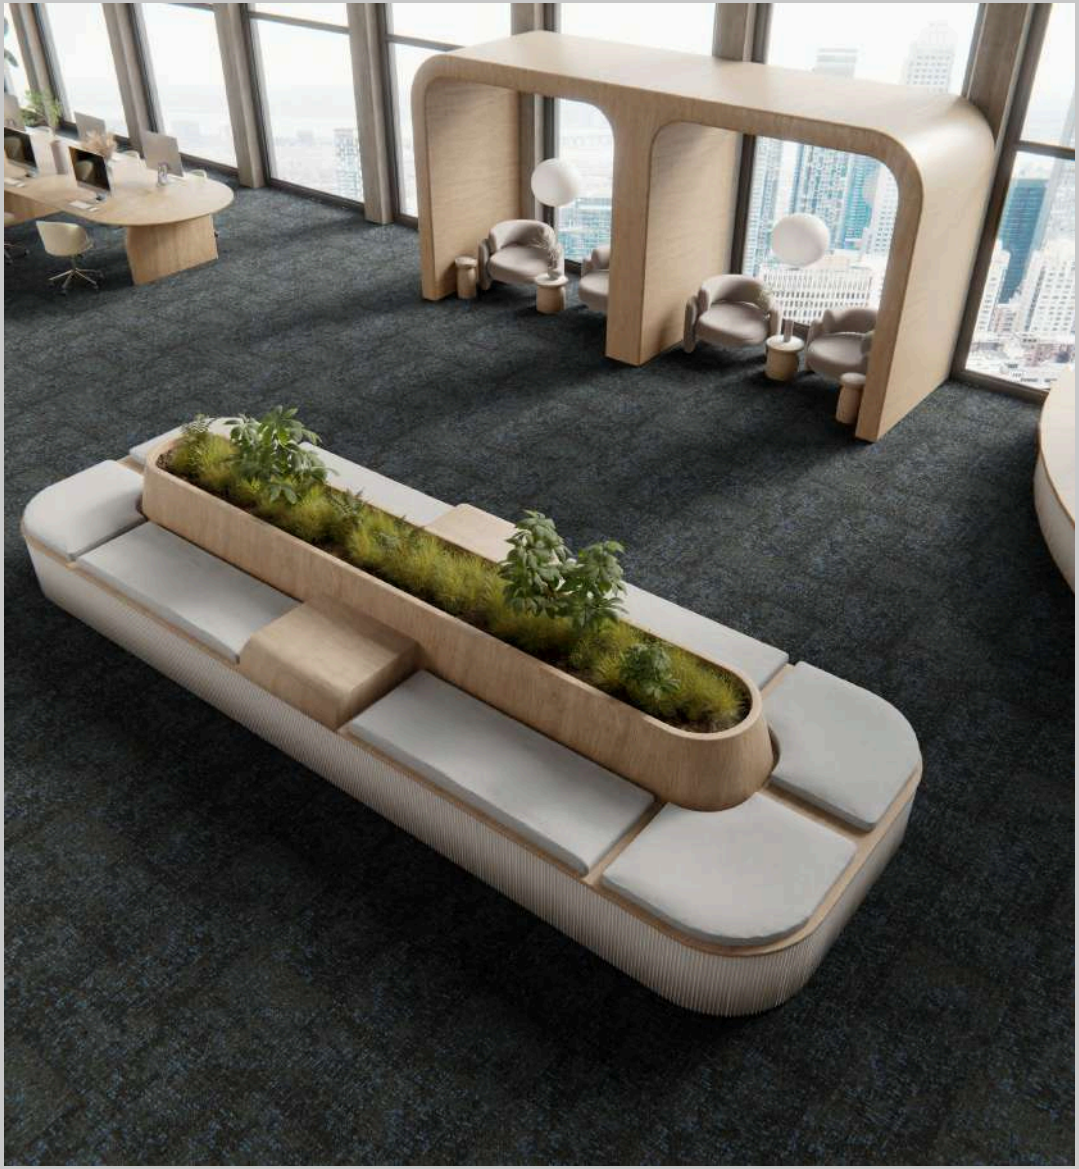

Neptune



Astra



Neptune



Mercury



Milky Way

B_

NON-STOCK


Belgotex™
African Skies



Milkyway



Nebula

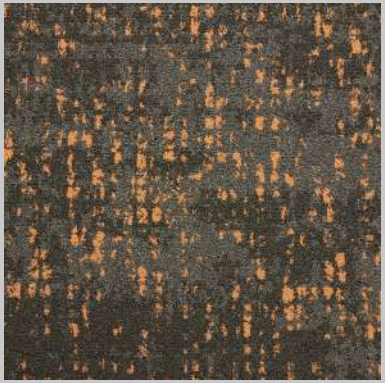

Saturn

*available on order basis, MOQ – 700 sqm

B_

EXTENDED SPECIFICATIONS

Use Classification: (EN 1307)	Heavy Commercial - 33
Construction:	Tufted Pattern Colour Placement Loop Pile
Fibre Type:	BCF Solution Dyed Nylon - SDN
Fibre Mass: (ISO 8543)	±450g/m2
Pile Height:	3-4mm
Total Thickness: (ISO 8543)	±7.5mm
Total Mass: (ISO 8543)	±2330/m2
Standard Size (Tiles):	50cm x 50cm
Standard Backing:	Eco Bac - 300g
Machine Gauge:	1/10"
Fire Classification: (EN 13501) (ASTM E 648-08)	Bfl-s1/Class 1

Colour Fastness to: (NF EN ISO 105-B02) (ISO 105-E01) (ISO 105-X12) (ISO 105-X12)	Light 8.0 Water 4.5 Dry Rubbing 4.5 Wet Rubbing 4.5
Electrostatic Propensity (EN 14041) / (ISO 6356)	⩽2.0kV
Sound Absorption: (EN ISO 354)	0.15 aw
Sound Insulation: (EN ISO 10140)	18dB
Thermal Resistance: (ISO 8302)	0.0649 m2.K/W
Dimensional Stability: (ISO 986:2006)	Shrinkage and Extension⩽0.2%
VOC Emissions: (ASTM D5116)	TVOC Emission Rates within limits.
Castor Chair Suitability: (NF EN 985)	Intensive Use
Warranty:	15 year
Guarantee:	5 year

B_

TECHNICAL SPECS

Bill of Quantities

- Belgotex AFRICAN SKIES 50cm x 50cm Heavy Commercial ± 7.5mm Bitumen Free tiles are manufactured from Stainproof SDX (Solution Dyed Nylon 6 for Extreme Conditions).
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex AFRICAN SKIES tiles to be installed in the following directions: Ashlar, RandomAshlar, Brick, Monolithic & Tesselated.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15-year warranty and 5-year guarantee.
- Made in South Africa.
- Green Tag level A Silver rated certification.
- **Note**: Belgotex offers customization of this product in colour, backing and size. Please contact a Belgotex representative for more information.

*All product names and logos are trademarksof BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guaranteeto limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.



B_


CLOUDS
COLLECTIONS






CLOUDS-01

CLOUDS-02








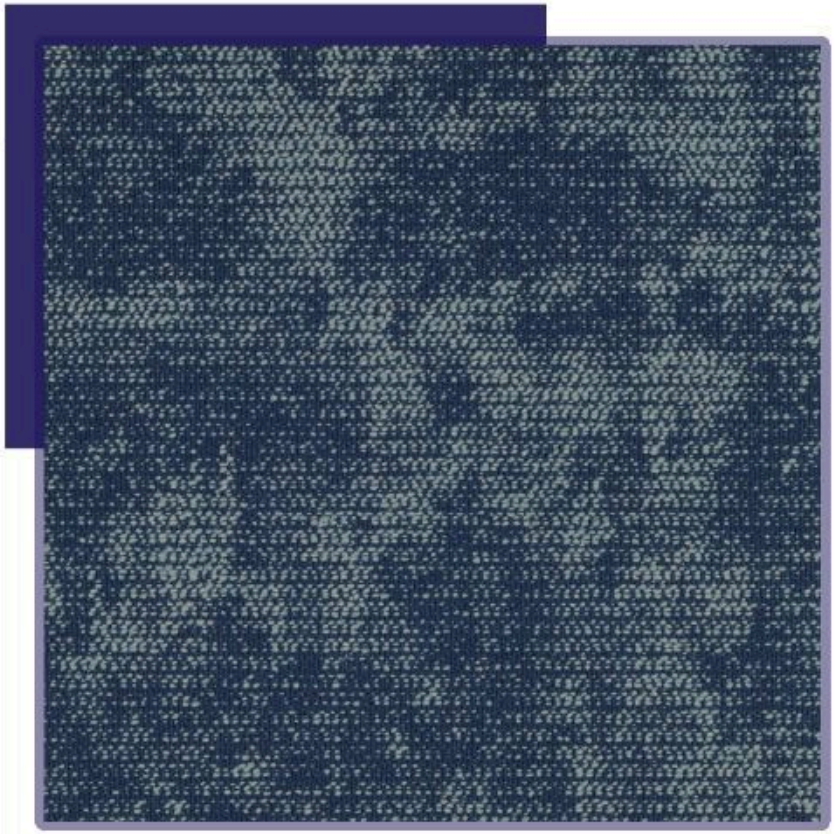

CLOUDS-03

CLOUDS-04

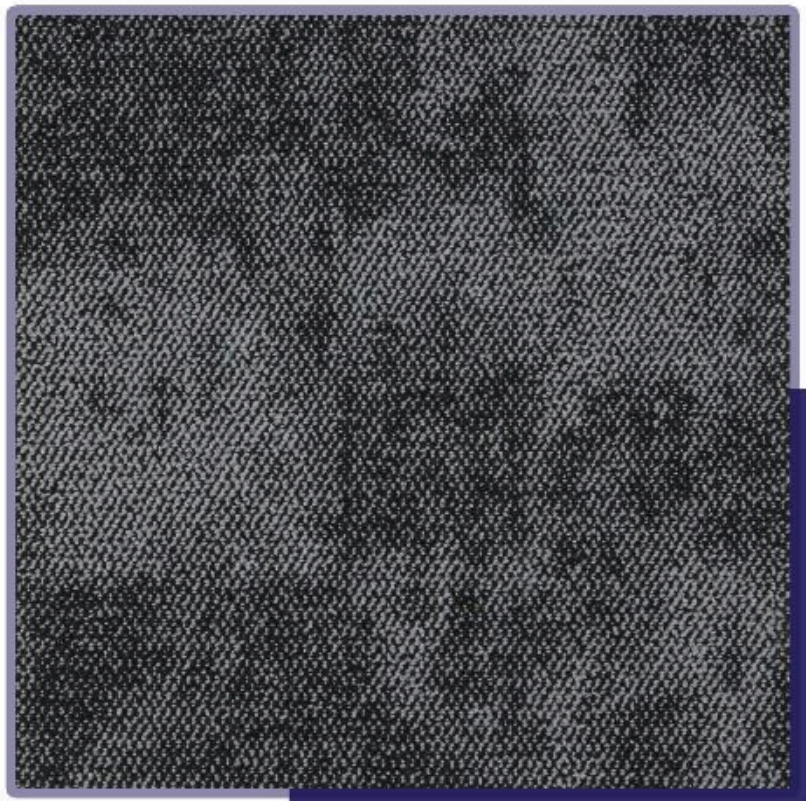










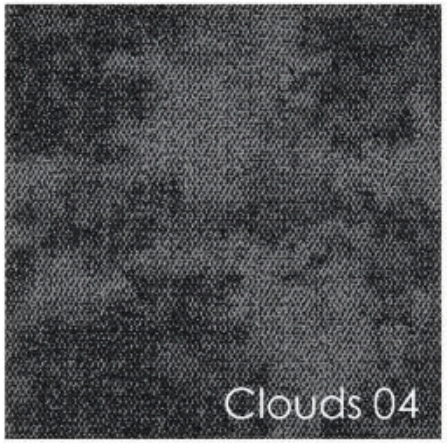

SPECIFICATION:

Construction:	Multi-level Loop
Fiber:	100% Nylon
Dye method:	100% Solution Dyed
Gauge:	1/12"
Pile weight:	550g/m²(±5%)
Total weight:	4850g/m²(±5%)
Average pile height:	5.0mm(±0.5mm)
Total height:	6.5mm(±0.5mm)
Backing:	PVC
Size:	50x50cm
Dimensional stability:	≤0.2%
Packaging box:	20 tiles/ 5 m², pallet 200 m²
Area of Use:	Commercial – Heavy Duty

INSTALLATION METHOD:

